


PPPOE kapcsolat beállítása TP-LINK routeren lépésről lépésre.

- Először is a routert csatlakoztatni kell a hálózathoz. A router hátoldalán lévő kék színű aljzatba kell csatlakoztatni a szolgáltatói ethernet kábelt, a sárga színű aljzatba pedig a számítógépet illetve az egyéb kábeles hálózati eszközöket. Ezt követően kell a routert áram alá helyezni.



- A router beállítását célszerű kábeles kapcsolaton keresztül megtenni.
- A router beállítását a számítógép csatlakoztatását követően egy böngésző program (Edge, Chrome, FireFox, ...stb.) elindításával tudjuk megtenni.
- A böngésző program címsorába begépeljük a 192.168.0.1-es IP címet, majd az enter leütését követően megjelenik a router beállítás varázslója.

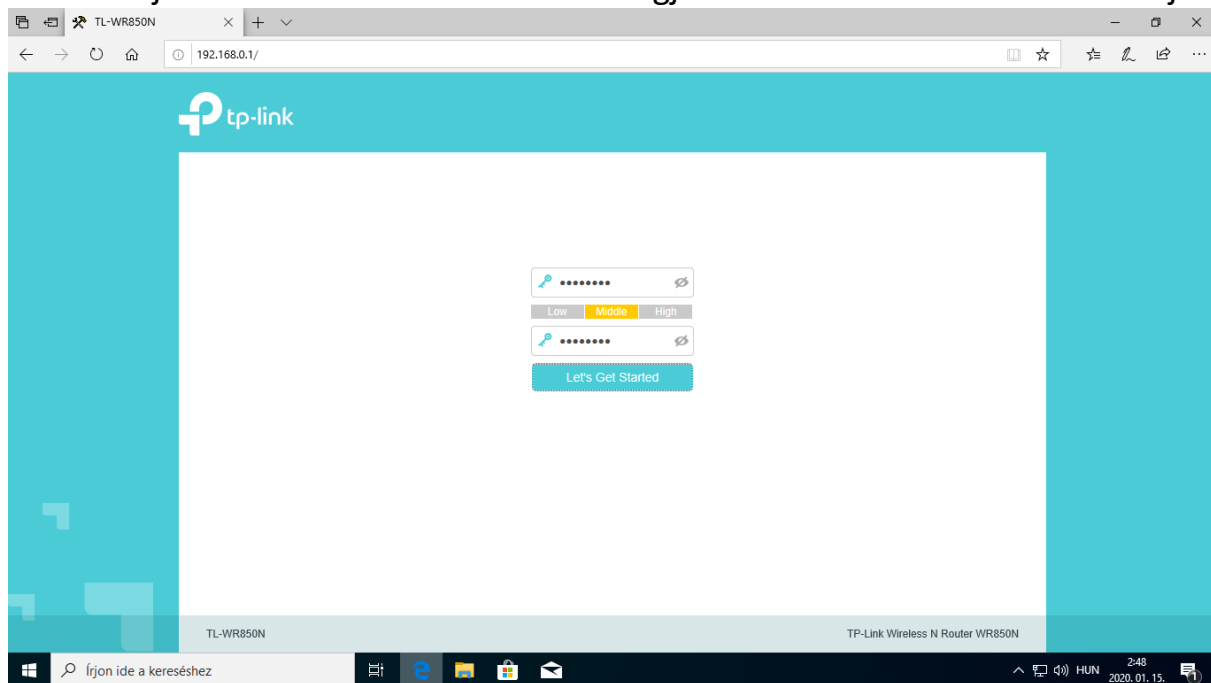

- A megjelenő oldalon be kell állítani a routerünk belépési jelszavát. Amint beírtuk kétszer a routerünk új jelszavát a **Let's Get Started** gombra kattintva el is kezdhetjük a többi paraméter beállítását.

- A megjelenő oldalon ki kell választani, hogy **PPPoE** kapcsolattal kívánunk csatlakozni az internetre, majd a **NEXT** gombra kattintva kell megadni a szolgáltatótól kapott **PPPoE azonosítót** és a **hozzá tartozó jelszót**.

The image displays two screenshots of the TP-Link router's web-based configuration interface, specifically the 'Quick Setup' wizard.

Top Screenshot (Archer C5): The 'Connection Type' step is active. The progress bar shows 'Connection Type' as the current step, followed by 'Internet Setup', 'Wireless Settings', 'Summary', and 'Connection Test'. The 'PPPoE' option is selected with a radio button. Other options include 'Dynamic IP', 'Static IP', 'L2TP', and 'PPTP'. A 'Next' button is visible at the bottom right.

Bottom Screenshot (TL-WR850N): The 'Internet Setup' step is active. The progress bar shows 'Internet Setup' as the current step. The 'VLAN ID' section has an 'Enable' checkbox. Below, the text 'Please enter your PPPoE username and password.' is followed by input fields for 'Username' (containing 'azonosito@ftb.internet-x.hu') and 'Password' (containing 'kapott_jelszo'). 'Back' and 'Next' buttons are at the bottom.


- Ezt követően a **NEXT** gombra kattintva kell beállítanunk a WIFI hálózatunkat. Itt kell megadni a **WIFI hálózat** nevét és a **WIFI hálózat jelszavát**, vagy hagyhatjuk a router által felkínált adatokat is. A beállítást követően a **NEXT** gombra kattintva láthatjuk kiírva a WIFI hálózatunk nevét és jelszavát ismételten, valamint itt kell kiválasztani, hogy az a számítógép amivel a beállításokat végezzük, kábelen vagy vezeték nélküli kapcsolattal csatlakozik a routerhez. Amint kiválasztottuk a **NEXT** gomb aktívvá válik.

The image displays two screenshots of the TP-Link router's web interface during the Quick Setup process.

Top Screenshot: The 'Wireless Settings' step is active. A progress bar at the top shows the steps: Connection Type, Internet Setup, Wireless Settings (current), Summary, and Connection Test. The text reads: "You can change the wireless network name and password." Under "2.4GHz Wireless:", there is a checked box for "Enable Wireless Radio". Below that, the "Network Name (SSID):" field contains "WIFI-hálózat-neve" and the "Password:" field contains "WIFI-hálózat-jelszava". There are "Back" and "Next" buttons at the bottom.

Bottom Screenshot: The 'Wireless Settings' step is completed. The text reads: "Wireless settings have been changed successfully. Please use the following wireless network names and passwords for your wireless connection." The settings are listed as: "2.4GHz Wireless: Enabled", "Network Name (SSID): WIFI-hálózat-neve", and "Password: WIFI-hálózat-jelszava". Below this, it asks to "Please choose your current connection to continue:" with two radio buttons: "I have successfully reconnected to the router using the new wireless settings." (unselected) and "I am using a wired connection." (selected). There are "Back" and "Next" buttons at the bottom.

- A megjelenő oldalon láthatjuk ismét összegezve a beállításokat. A **SAVE** gombra kattintva menthetjük el a beállításokat. A mentést követően a router újra indul az általunk elmentett beállításokkal.

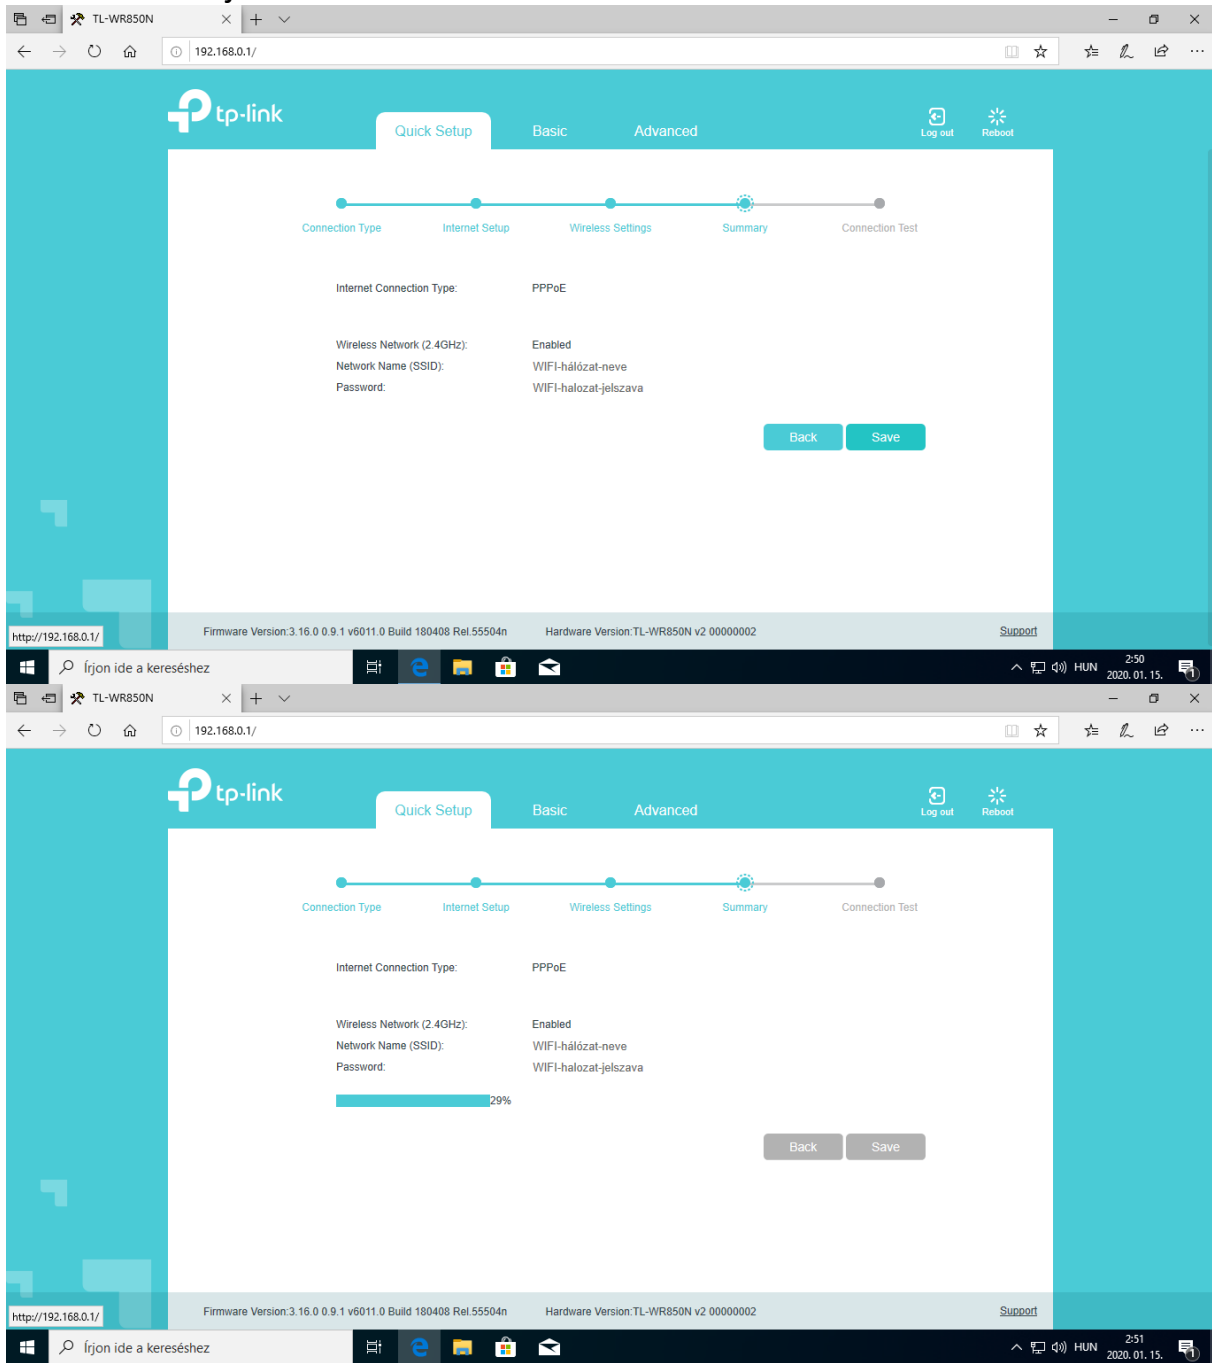

PPPOE kapcsolat beállítása TP-LINK routeren

- Az újra indulást követően a megjelenő oldalon a **Finish** gombra kattintva már láthatjuk is, hogy a routerünk csatlakozott az internetre.

The top screenshot shows the TP-LINK router web interface at the 'Quick Setup' stage. The progress bar indicates the 'Connection Test' step is active. A 'Test Internet Connection' button is visible, along with 'Back' and 'Finish' buttons. The interface includes the TP-LINK logo, navigation tabs for 'Quick Setup', 'Basic', and 'Advanced', and utility buttons for 'Log out' and 'Reboot'. The bottom status bar shows 'Firmware Version: 3.16.0 0.9.1 v6011.0 Build 180408 Rel.55504n' and 'Hardware Version: TL-WR850N v2 00000002'.

The bottom screenshot shows the 'Basic' configuration page. It features a network diagram with 'Internet' connected to the 'TL-WR850N' router, which is connected to 'Wireless Clients' and 'Wired Clients'. A sidebar on the left contains a search bar and menu items: 'Network Map', 'Internet', 'Wireless', and 'Parental Controls'. Below the diagram, the 'Internet' status is shown as 'Connected' with the following details:

Internet	
Internet Status:	Connected
Connection Type:	PPPoE
IP Address:	213.157.109.131